

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
 Telefon ++49 351 8890891 · Fax 8805115
 graficor@aol.com

V.A.T.-Nr. DE 120807826
 Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 10

Resin

GC 10 has very good scratch and smudge resistance.
 Temperature over 100°C.
 Highly solvent resistance.
 It works on Flat-Head.

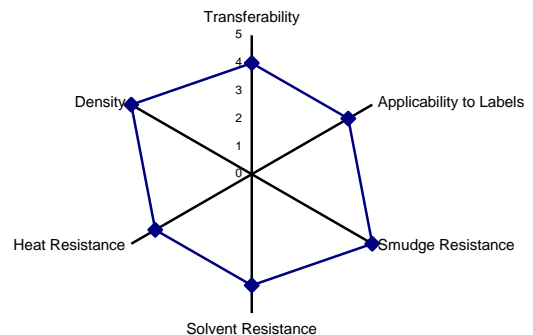

Ribbon Properties

Ink Type	Resin
Ribbon Thickness	8.0 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 1.0 (Macbeth)
Recording Energy	17mJ/mm ²

Printing Properties

Image Density	More than 1.0 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Vinyl, Polyethylene, Polypropylene, Polyester
Print Speed	Up to 8 inch/sec
Usage Conditions	5°C to 35°C, 30% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 30% to 90% Relative Humidity

