

**THERMAL TRANSFER RIBBON**


Oderstraße 11 · 01109 Dresden / Germany  
 Telefon ++49 351 8890891 · Fax 8805115  
 graficor@aol.com

V.A.T.-Nr. DE 120807826  
 Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

**GC 17**

• **Wax / Resin**

GC 17 is a wax/resin ribbon, especially designed for use on Inline- printers with Near Edge/Corner Edge type of print heads. It provides a high resolution image on a wide variety of label stocks with excellent smudge resistance.

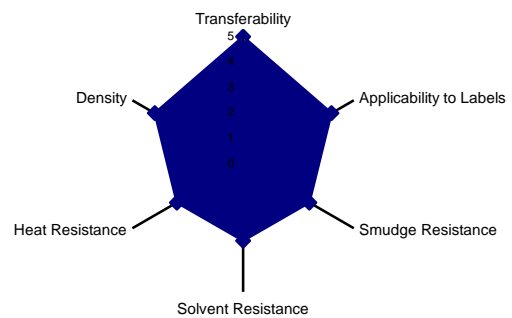

• **Ribbon Properties**

Ink Type	Wax/Resin
Ribbon Thickness	7.0 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 0.80 (Macbeth)
Recording Energy	13 mJ/mm <sup>2</sup>

• **Printing Properties**

Image Density	More than 1.5 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Coated Paper, Gloss Paper, Synthetic Paper, PE, PET, PP, Flexible Packaging Application
Print Speed	up to 18"/sec.
Usage Conditions	5°C to 35°C, 20% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 20% to 80% Relative Humidity

