

## THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany  
Telefon ++49 351 8890891 · Fax 8805115  
graficor@aol.com

V.A.T.-Nr. DE 120807826  
Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

### GC 1LG

- Resin enhanced Wax

GC 1LG is a premium wax ribbon, designed to work on a wide range of Flat-printers. It is suitable for printing on many different types of label stocks. It also works on Near-Edge Printers.

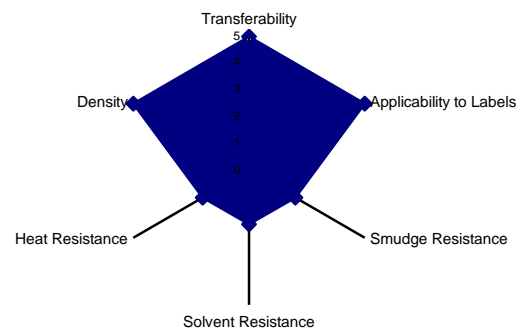

- Ribbon Properties

Ink Type	Wax
Ribbon Thickness	7.7 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 1.2 (Macbeth)
Recording Energy	12 mJ/mm <sup>2</sup>

- Printing Properties

Image Density	More than 1.9 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Vellum, Coated Paper, Gloss Paper, Synthetic Paper
Print Speed	300 mm/sec.
Usage Conditions	5°C to 35°C, 20% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 20% to 90% Relative Humidity

