

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
Telefon ++49 351 8890891 · Fax 8805115
graficor@aol.com

V.A.T.-Nr. DE 120807826
Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 1LS

- Resin enhanced Wax

GC 1LS is a premium wax ribbon, designed to work on a wide range of printers. It is suitable for printing on many different types of label stocks. Very good smear and scratch resistance, because of small resin share.

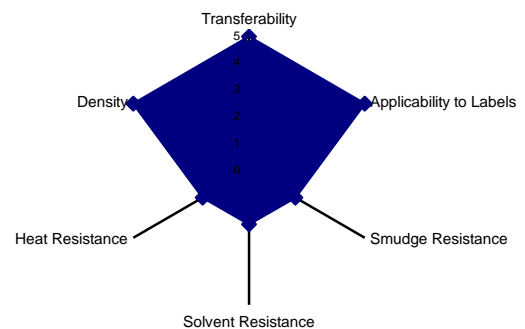

- Ribbon Properties

Ink Type	Wax
Ribbon Thickness	7.7 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 1.2 (Macbeth)
Recording Energy	12 mJ/mm ²

- Printing Properties

Image Density	More than 1.9 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Vellum, Coated Paper, Gloss Paper, Synthetic Paper PE, PP, PET
Print Speed	300 mm/sec.
Usage Conditions	5°C to 35°C, 20% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 20% to 90% Relative Humidity

