

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
 Telefon ++49 351 8890891 · Fax 8805115
 graficor@aol.com

V.A.T.-Nr. DE 120807826
 Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 1NE

- Resin Enhanced Wax**

GC 1NE is a premium wax ribbon, designed to work on a wide range of Near Edge printers. It is suitable for printing on many different types of label stocks. It also works on Flat-Head Printers.

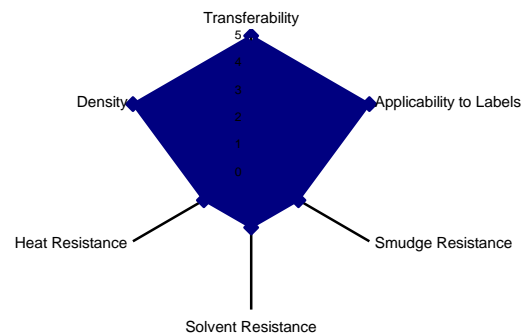

- Ribbon Properties**

| | |
|----------------------|-------------------------|
| Ink Type | Wax |
| Ribbon Thickness | 8.7 µm |
| Base Film Material | Polyester |
| Base Film Thickness | 4.5 µm |
| Ink Colour | Black |
| Transmission Density | More than 1.2 (Macbeth) |
| Recording Energy | 13 mJ/mm ² |

- Printing Properties**

| | |
|--------------------|---|
| Image Density | More than 1.3 (Macbeth) |
| Symbol Grade | More than ANSI 3.5, A (Parallel Bar Code) |
| Label Face Stock | Coated Paper, Gloss Paper, Synthetic Paper, PE-vellum |
| Print Speed | up to 10"/sec |
| Usage Conditions | 5°C to 35°C, 20% to 80% Relative Humidity |
| Storage Conditions | 0°C to 40°C, 20% to 80% Relative Humidity |

