

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
Telefon ++49 351 8890891 · Fax 8805115
graficor@aol.com

V.A.T.-Nr. DE 120807826
Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 2

- Wax/Resin

GC 2 is a wax/resin ribbon, designed to work on a wide range of printers. It is suitable for printing on many different types of label stocks.

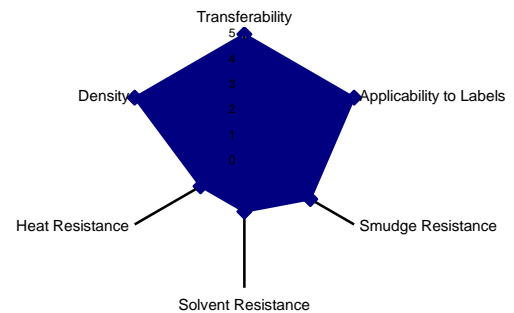

- Ribbon Properties

Ink Type	Wax/Resin
Ribbon Thickness	8.1 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Blue, brown, gold, green, grey, purple, red, silver, yellow, white
Transmission Density	Less than 1.6 (Macbeth)
Recording Energy	13 mJ/mm ²

- Printing Properties

Image Density	More than 1.9 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Coated Paper, Gloss Paper, Synthetic Paper, Film (PET, PVC, PE)
Print Speed	up to 10"/sec.
Usage Conditions	5°C to 35°C, 10% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 10% to 90% Relative Humidity

