

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
 Telefon ++49 351 8890891 · Fax 8805115
 graficor@aol.com

V.A.T.-Nr. DE 120807826
 Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 21

- Resin**

GC 21 provides a durable image resistant to indirect heat from a steam iron up to temperatures of 200° C. The image remains of a high quality and retransfer of the image to other materials is avoided during the ironing process.

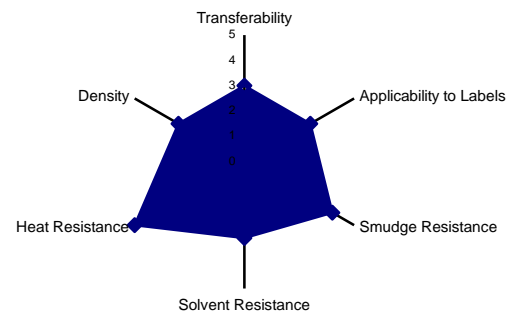

- Ribbon Properties**

Ink Type	Resin
Ribbon Thickness	7.5 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 1.0 (Macbeth)
Recording Energy	17 mJ/mm ²

- Printing Properties**

Image Density	More than 1.7 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Coated Paper, Gloss Paper, Synthetic Paper, Tag, PE, PP, PET
Print Speed	up to 8"/sec.
Usage Conditions	5°C to 35°C, 20% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 20% to 90% Relative Humidity

