

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
Telefon ++49 351 8890891 · Fax 8805115
graficor@aol.com

V.A.T.-Nr. DE 120807826
Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 25

- Wax / Resin

GC 25 is a wax/resin ribbon, especially designed for use on Printers with Near Edge/Corner Edge type of print heads. It provides a high resolution image on a wide variety of label stocks with excellent smudge resistance. It also works on Inline-Printers.

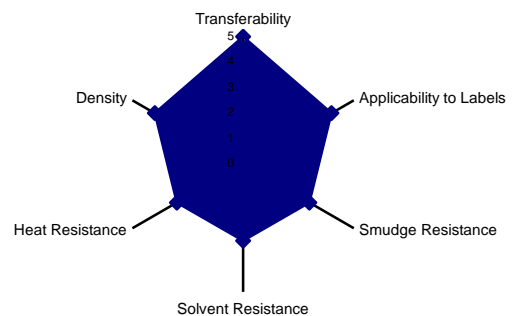

- Ribbon Properties

Ink Type	Wax/Resin
Ribbon Thickness	7.0 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 0.80 (Macbeth)
Recording Energy	13 mJ/mm ²

- Printing Properties

Image Density	More than 1.5 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Coated Paper, Gloss Paper, Synthetic Paper, PE, PET, PP, Flexible Packaging Application
Print Speed	up to 18"/sec.
Usage Conditions	5°C to 35°C, 20% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 20% to 80% Relative Humidity

