

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
Telefon ++49 351 8890891 · Fax 8805115
graficor@aol.com

V.A.T.-Nr. DE 120807826
Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 3

Resin

GC 3 has very good scratch and smudge resistance.
Temperature over 105° C.
Very good solvent resistance.
High UV durability up to 4 years.
It works on Flat-Head Printers.

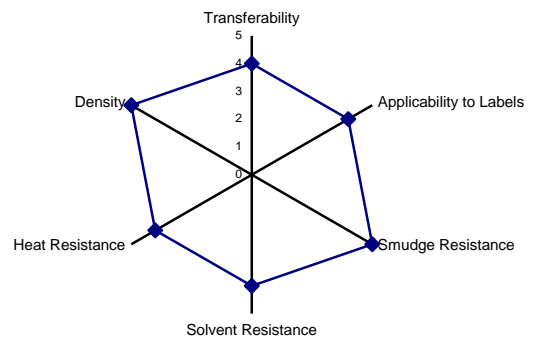

Ribbon Properties

| | |
|----------------------|-------------------------|
| Ink Type | Resin |
| Ribbon Thickness | 8.0 µm |
| Base Film Material | Polyester |
| Base Film Thickness | 4.5 µm |
| Ink Colour | Black |
| Transmission Density | More than 1.0 (Macbeth) |
| Recording Energy | 17mJ/mm ² |

Printing Properties

| | |
|--------------------|---|
| Image Density | More than 1.0 (Macbeth) |
| Symbol Grade | More than ANSI 3.5, A (Parallel Bar Code) |
| Label Face Stock | Vinyl, Polyethylene, Polypropylene, Polyester |
| Print Speed | Up to 8 inch/sec |
| Usage Conditions | 5°C to 35°C, 30% to 80% Relative Humidity |
| Storage Conditions | 0°C to 40°C, 30% to 90% Relative Humidity |

