

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
 Telefon ++49 351 8890891 · Fax 8805115
 graficor@aol.com

V.A.T.-Nr. DE 120807826
 Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 37

Resin

GC 37 is specially designed for inline packaging printers.
 Very good scratch and smudge resistance on all synthetics.
 Heat resistance up to 150°C.
 Excellent solvent resistance.
 Flat-Head use possible.

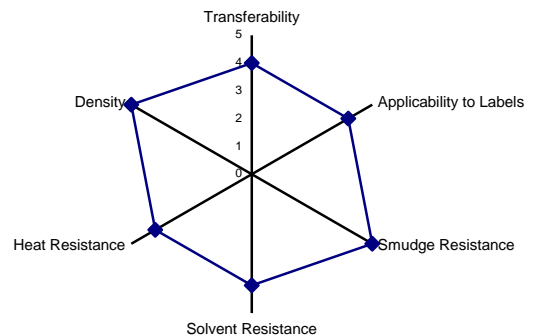

Ribbon Properties

Ink Type	Resin
Ribbon Thickness	8.0 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 1.0 (Macbeth)
Recording Energy	17mJ/mm ²

Printing Properties

Image Density	More than 1.0 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Vinyl, Polyethylene, Polypropylene, Polyester
Print Speed	Up to 8 inch/sec
Usage Conditions	5°C to 35°C, 30% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 30% to 90% Relative Humidity

