

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
 Telefon ++49 351 8890891 · Fax 8805115
 graficor@aol.com

V.A.T.-Nr. DE 120807826
 Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 5

Wax/Resin

GC 5 is a standard wax/resin ribbon, designed to work on a wide range of printers and label stocks. It works on both Flat Head and Near Edge printers.

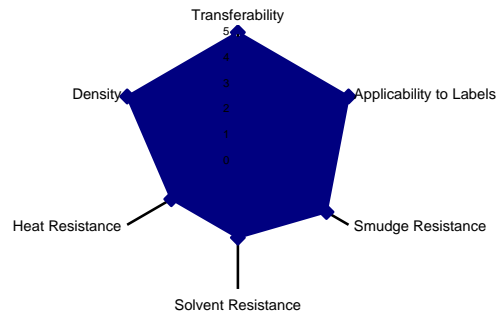

Ribbon Properties

Ink Type	Wax
Ribbon Thickness	8.1 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 1.5 (Macbeth)
Recording Energy	13 mJ/mm ²

Printing Properties

Image Density	More than 1.8 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	Coated Paper, Gloss Paper, Synthetic Paper, PET, PP, PE, Tyvek
Print Speed	up to 10"/sec.
Usage Conditions	5°C to 35°C, 20% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 20% to 90% Relative Humidity

