

THERMAL TRANSFER RIBBON


Oderstraße 11 · 01109 Dresden / Germany
Telefon ++49 351 8890891 · Fax 8805115
graficor@aol.com

V.A.T.-Nr. DE 120807826
Handelsregister Amtsgericht Charlottenburg HRB 92618, Geschäftsführerin: Erika Walther

GC 7K

Resin

GC 7K is dry clean and laundry safe. It prints on woven and nonwoven fabrics. It also works on synthetics and satins.
Washable to 90°C.
Smudge resistance to 150°C.
Usable on near-edge printers

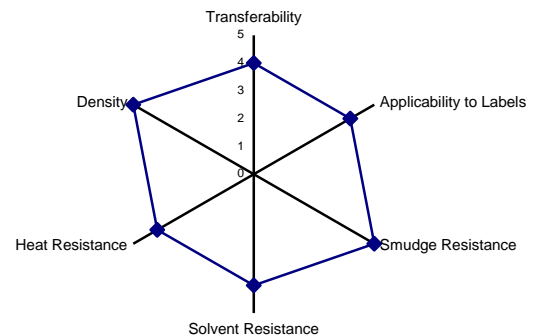

Ribbon Properties

Ink Type	Resin
Ribbon Thickness	8.0 µm
Base Film Material	Polyester
Base Film Thickness	4.5 µm
Ink Colour	Black
Transmission Density	More than 1.0 (Macbeth)
Recording Energy	17mJ/mm ²

Printing Properties

Image Density	More than 1.0 (Macbeth)
Symbol Grade	More than ANSI 3.5, A (Parallel Bar Code)
Label Face Stock	nylon taft, satin, synthetics
Print Speed	Up to 8 inch/sec
Usage Conditions	5°C to 35°C, 30% to 80% Relative Humidity
Storage Conditions	0°C to 40°C, 30% to 90% Relative Humidity

